

Request for Qualification cum Request for Proposal for Interior Works of
Special Purpose Vehicle (SPV) Building at ABCD Complex in DSIR

Addendum no. 01

Sr.n o.	Page No	Clause No	Original Clause	To be replaced by
1.	(i) 48 (ii) 30	(i) Section 2 Appendices, Appendix-A Bill of Quantities Item no. 141 (ii) Section 3, C, 1. Technical Specifications of Civil and Interior Items, Item no. 141	Wash basin counter - (Counter width- 600mm): Providing & fixing two layers of wash basin counter, first layer using 25mm thick Kotastone of approved shade and second layer using approved shade and sample of Mirror finish Granite, joined together with 1:4 Cement mortar beding / approved tile adhesive, to true plane & level or to slopes, or close jointed with cement slurry with pigment of matching shade and colour and finishing with the same, including dedo 1'6" ht, cutting kotah & tile as per required shape & size to fit Wash basin,& 3" to 9" fascia with moulding, nosing, chamfered front edges, fixing, disposal of debris etc. finished as per design in detail drawing and instruction of Employer's representative/ Employer. Granite with finish. The sample mock shall be approved from Employer's representative/ Employer.	Wash basin counter - (Counter width- 600mm): Providing & fixing two layers of wash basin counter, first layer using 25mm thick Kotastone of approved shade and second layer using approved shade and sample of Mirror finish Granite 18mm thick , joined together with 1:4 Cement mortar beding / approved tile adhesive, to true plane & level or to slopes, or close jointed with cement slurry with pigment of matching shade and colour and finishing with the same, including dedo 1'6" ht , cutting kotah & tile as per required shape & size to fit Wash basin,& 3" to 9" fascia with moulding, nosing, chamfered front edges, fixing, disposal of debris etc. finished as per design in detail drawing and instruction of Employer's representative/ Employer. Granite with finish. The sample mock shall be approved from Employer's representative/ Employer.
2.	(i) 49 (ii) 31	(i) Section 2 Appendices, Appendix-A Bill of Quantities Item no. 142 (ii) Section 3, C, 1. Technical Specifications of Civil and Interior Items, Item no. 142	Granite Platform (All Floor: Width - 600 mm): Providing and constructing approved shade and sample of Mirror finish granite platform, 600mm width 25 mm thick Machine polished kotah stone as vertical supports at sides, including cutting granite & kotah as per required shape , dedo 1'6" ht & size to fit kitchen sink, moulding, tiles adhesive nosing, chamfered front edges, fixing, disposal of debris etc complete with all labour and materials and as per detailed drawings / architects instruction and approval by Employer/Employer's representative.The sample mock shall be approved from Employer's representative/ Employer.	Granite Platform (All Floor: Width - 600 mm): Providing and constructing approved shade and sample of Mirror finish 18 mm thick granite platform, 600mm width 25 mm thick Machine polished kotah stone as vertical supports at sides, including cutting granite & kotah as per required shape, dedo 1'6" ht & size to fit kitchen sink, moulding, tiles adhesive nosing, chamfered front edges, fixing, disposal of debris etc complete with all labour and materials and as per detailed drawings / architects instruction and approval by Employer/Employer's representative.The sample mock shall be approved from Employer's representative/ Employer.
3.	100	Section 2 Appendices, Appendix-A	Supplying and installing following size of perforated pre-painted M.S. cable trays with perforation not more than 17.5%, in convenient sections, joined with connectors, suspended from the	Supplying and installing following size of perforated Hot Dipped G.I. cable trays (galvanisation thickness not less than 50 microns) with perforation not more than 17.5%, in convenient sections,

Request for Qualification cum Request for Proposal for Interior Works of
Special Purpose Vehicle (SPV) Building at ABCD Complex in DSIR

Sr.n o.	Page No	Clause No	Original Clause	To be replaced by
		Bill of Quantities Item no. 568	ceiling with M.S. suspenders including bolts & nuts, painting suspenders etc as required. 200mm width X 50mm depth X 1.6mm thickness	joined with connectors, suspended from the ceiling with G.I. suspenders including G.I. bolts & nuts, etc as required. 225mm width X 50mm depth X 1.6mm thickness
4.	(i) 59 (ii) 57	(i) Section 2 Appendices, Appendix-A Bill of Quantities Item no. 172 (ii) Section 3, C, 1. Technical Specifications of Civil and Interior Items, Item no. 172	Single Leaf Flush Door with frame and finish with 1.5 mm thick (40MM): Providing and fixing in position 40 mm thick solid core wooden single leaf flush doors of approved make having fire retardant ply facing on both sides and finished with 1.5 mm thick laminate as approved, frame size – 100 x 50 MM, Hardware system of Geze/Dorma like Hinges, Boxer type door closer, Door handle, Euro profile, lock, Door stop. Work complete including all type of hardware, fittings, fixtures etc complete as per detailed drawings and specifications. (At all floor)	Single Leaf Flush Door with solid wood frame (with melamine finish) and finish with 1.5 mm thick (40MM): Providing and fixing in position 40 mm thick solid core wooden single leaf flush doors of approved make having fire retardant ply facing on both sides and finished with 1.5 mm thick laminate as approved, frame size – 100 x 50 MM, Hardware system of Geze/Dorma like Hinges, Boxer type door closer, Door handle, Euro profile, lock, Door stop. Work complete including all type of hardware, fittings, fixtures etc complete as per detailed drawings and specifications. (At all floor)
5.	82	Section 3, C, 1. Technical Specifications of Civil and Interior Items, Item no. 205	Material: <ul style="list-style-type: none"> • IS 303 ply shall be used as per approved make and sample by Employer's representative/employer • Veneer shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer. 	Material: <ul style="list-style-type: none"> • Table shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer.
6.	83	Section 3, C, 1. Technical Specifications of Civil and	Material: <ul style="list-style-type: none"> • IS 303 ply shall be used as per approved make and sample by Employer's representative/employer • Veneer shall be used as per approved make and sample by Employer's representative/employer 	Material: <ul style="list-style-type: none"> • Table shall be used as per approved make and sample by Employer's representative/employer

Request for Qualification cum Request for Proposal for Interior Works of
Special Purpose Vehicle (SPV) Building at ABCD Complex in DSIR

Sr.n o.	Page No	Clause No	Original Clause	To be replaced by
		Interior Items, Item no. 206	<ul style="list-style-type: none"> Hardware's shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer All type of material shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer. 	<ul style="list-style-type: none"> Hardware's shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer All type of material shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer.
7.	84	Section 3, C, 1. Technical Specifications of Civil and Interior Items, Item no. 207	<p>Material:</p> <ul style="list-style-type: none"> IS 303 ply shall be used as per approved make and sample by Employer's representative/employer Veneer shall be used as per approved make and sample by Employer's representative/employer Hardware's shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer All type of material shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer. 	<p>Material:</p> <ul style="list-style-type: none"> Table shall be used as per approved make and sample by Employer's representative/employer Hardware's shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer All type of material shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer.
8.	85	Section 3, C, 1. Technical Specifications of Civil and Interior Items, Item no. 208	<p>Material:</p> <ul style="list-style-type: none"> IS 303 ply shall be used as per approved make and sample by Employer's representative/employer Veneer shall be used as per approved make and sample by Employer's representative/employer Hardware's shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer All type of material shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer. 	<p>Material:</p> <ul style="list-style-type: none"> Table shall be used as per approved make and sample by Employer's representative/employer Hardware's shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer All type of material shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer.
9.	86	Section 3, C, 1. Technical Specifications of Civil and	<p>Material:</p> <ul style="list-style-type: none"> IS 303 ply shall be used as per approved make and sample by Employer's representative/employer 	<p>Material:</p> <ul style="list-style-type: none"> Table shall be used as per approved make and sample by Employer's representative/employer

Request for Qualification cum Request for Proposal for Interior Works of
Special Purpose Vehicle (SPV) Building at ABCD Complex in DSIR

Sr.n o.	Page No	Clause No	Original Clause	To be replaced by
		Interior Items, Item no. 209	<ul style="list-style-type: none"> • Veneer shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer. 	<ul style="list-style-type: none"> • Hardware's shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer.
10.	87	Section 3, C, 1. Technical Specifications of Civil and Interior Items, Item no. 210	<p>Material:</p> <ul style="list-style-type: none"> • IS 303 ply shall be used as per approved make and sample by Employer's representative/employer • Veneer shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer. 	<p>Material:</p> <ul style="list-style-type: none"> • Table shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer.
11.	88	Section 3, C, 1. Technical Specifications of Civil and Interior Items, Item no. 211	<p>Material:</p> <ul style="list-style-type: none"> • IS 303 ply shall be used as per approved make and sample by Employer's representative/employer • Veneer shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer. 	<p>Material:</p> <ul style="list-style-type: none"> • Table shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer.
12.	89	Section 3, C, 1. Technical	<p>Material:</p>	<p>Material:</p>

Request for Qualification cum Request for Proposal for Interior Works of
Special Purpose Vehicle (SPV) Building at ABCD Complex in DSIR

Sr.n o.	Page No	Clause No	Original Clause	To be replaced by
		Specifications of Civil and Interior Items, Item no. 212	<ul style="list-style-type: none"> • IS 303 ply shall be used as per approved make and sample by Employer's representative/employer • Veneer shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer. 	<ul style="list-style-type: none"> • Table shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer.
13.	90	Section 3, C, 1. Technical Specifications of Civil and Interior Items, Item no. 213	<p>Material:</p> <ul style="list-style-type: none"> • IS 303 MR gradeply shall be used as per approved make and sample by Employer's representative/employer • Laminate shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer <p>Workmanship:</p> <ul style="list-style-type: none"> • Counter made from 19 mm IS 303 MR gradeply structure and top finish with 16-18 mm th granite with both side 1.5 mm thick laminate shall be of approved make & shade and as per the detail drawing. • All the edges of ply shall be covered with 1.5 mm thick laminate finish. • Work inclusive of platform nosing with edge finish & 3 " ht dedo fixing toward wall side & all necessary brass satin finish nickel 	<p>Material:</p> <ul style="list-style-type: none"> • Storage shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer. • All type of material shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer. <p>Workmanship:</p> <ul style="list-style-type: none"> • Work complete as per above specification. • Work complete including all types of tools, tackles, labour etc complete at any level and height. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer. <p>Measurements:</p> <ul style="list-style-type: none"> • The rate shall be consolidated for all above items.

Request for Qualification cum Request for Proposal for Interior Works of Special Purpose Vehicle (SPV) Building at ABCD Complex in DSIR

Sr.n o.	Page No	Clause No	Original Clause	To be replaced by
			<p>plated/S.S 304 grade hardware like Hinges, locks,6"handle , 75 mm tower bolts, ball catches/Magnet,</p> <ul style="list-style-type: none"> • Inclusive of shelf both side 1.5 mm thick laminate finish and as per detail drawer unit with SS 304 grade kitchen basket as per selection by Employer's representative/employer • Work complete including all types of tools, tackles, labour etc complete at any level and height. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer <p>Measurements:</p> <ul style="list-style-type: none"> • The rate shall be consolidated for all above items. • The rate shall include the cost of all materials, labour, scaffolding etc. to complete the whole work satisfactorily as per instruction of Employer's representative/employer • No extra payment will be given for any of the reasons. • Rate to be inclusive of all material, wastage, necessary tools tackles etc for fixing at all heights and for all floors. • The rate shall be in sqm of elevation area for all floors and at all heights including all costs complete as per the Architectural drawings & instructions. Only the elevation area of the storage unit will be measured and paid for. Item for 1.5 mm thick laminate fixing and polishing is included in this item • The rate shall be for a unit of Numbers. 	<ul style="list-style-type: none"> • The rate shall include the cost of all materials, labour, scaffolding etc. to complete the whole work satisfactorily as per instruction of Employer's representative/employer • No extra payment will be given for any of the reasons. • Rate to be inclusive of all material, wastage, necessary tools tackles etc for fixing at all heights and for all floors. • The rate shall be in sqm of elevation area for all floors and at all heights including all costs complete as per the Architectural drawings & instructions. Only the elevation area of the storage unit will be measured and paid for. • The work done shall be measured in Square Meter for area of work done. The rate shall be for a unit of One Number.
14.	91	Section 3, C, 1. Technical Specifications of Civil and Interior Items, Item no. 214	<p>Material:</p> <ul style="list-style-type: none"> • IS303 MR Gradeply shall be used as per approved make and sample by Employer's representative/employer • Veneer shall be used as per approved make and sample by Employer's representative/employer 	<p>Material:</p> <ul style="list-style-type: none"> • BSL of 25mm thk shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and Approved by Employer's representative/employer

Request for Qualification cum Request for Proposal for Interior Works of Special Purpose Vehicle (SPV) Building at ABCD Complex in DSIR

Sr.n o.	Page No	Clause No	Original Clause	To be replaced by
			<ul style="list-style-type: none"> • Hardware's shall be used as per approved make list and confirming to relevant IS codes and Approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS Codes and approved by Employer's representative/employer <p>Workmanship:</p> <ul style="list-style-type: none"> • 35 mm thick top made from IS 303 MR Gradegrade ply with base ply veneer finish matt PU finish • Vertical support from ss 304 grade, including all type of hardware, fittings, fixtures, tools, Tackles, etc. complete. • Work complete including all types of tools, tackles, labour etc. complete at any level and Height. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer 	<ul style="list-style-type: none"> • All type of material shall be used as per approved make list and confirming to relevant IS Codes and approved by Employer's representative/employer <p>Workmanship:</p> <ul style="list-style-type: none"> • 25 mm thick top made from BSL. • Vertical support from ss 304 grade, including all type of hardware, fittings, fixtures, tools, Tackles, etc. complete. • Work complete including all types of tools, tackles, labour etc. complete at any level and Height. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer
15.	92	Section 3, C, 1. Technical Specifications of Civil and Interior Items, Item no. 215	<p>Material:</p> <ul style="list-style-type: none"> • IS303 MR Gradeply shall be used as per approved make and sample by Employer's representative/employer • Veneer shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and Approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS Codes and approved by Employer's representative/employer <p>Workmanship:</p> <ul style="list-style-type: none"> • 35 mm thick top made from IS 303 MR Gradegrade ply with base ply veneer finish matt PU finish 	<p>Material:</p> <ul style="list-style-type: none"> • BSL of 25mm thk shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and Approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS Codes and approved by Employer's representative/employer <p>Workmanship:</p> <ul style="list-style-type: none"> • 25 mm thick top made from BSL. • Vertical support from ss 304 grade, including all type of hardware, fittings, fixtures, tools, Tackles, etc. complete.

Request for Qualification cum Request for Proposal for Interior Works of Special Purpose Vehicle (SPV) Building at ABCD Complex in DSIR

Sr.n o.	Page No	Clause No	Original Clause	To be replaced by
			<ul style="list-style-type: none"> • Vertical support from ss 304 grade, including all type of hardware, fittings, fixtures, tools, Tackles, etc. complete. • Work complete including all types of tools, tackles, labour etc. complete at any level and Height. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer 	<ul style="list-style-type: none"> • Work complete including all types of tools, tackles, labour etc. complete at any level and Height. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer
16.	93	Section 3, C, 1. Technical Specifications of Civil and Interior Items, Item no. 216	<p>Material:</p> <ul style="list-style-type: none"> • IS303 MR Gradeply shall be used as per approved make and sample by Employer's representative/employer • Veneer shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and Approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS Codes and approved by Employer's representative/employer <p>Workmanship:</p> <ul style="list-style-type: none"> • 35 mm thick top made from IS 303 MR Gradegrade ply with base ply veneer finish matt PU finish • Vertical support from ss 304 grade, including all type of hardware, fittings, fixtures, tools, Tackles, etc. complete. • Work complete including all types of tools, tackles, labour etc. complete at any level and Height. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer 	<p>Material:</p> <ul style="list-style-type: none"> • BSL of 25mm thk shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and Approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS Codes and approved by Employer's representative/employer <p>Workmanship:</p> <ul style="list-style-type: none"> • 25 mm thick top made from BSL. • Vertical support from ss 304 grade, including all type of hardware, fittings, fixtures, tools, Tackles, etc. complete. • Work complete including all types of tools, tackles, labour etc. complete at any level and Height. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer
17.	94	Section 3, C, 1. Technical Specifications	<p>Material:</p> <ul style="list-style-type: none"> • IS303 MR Gradeply shall be used as per approved make and sample by Employer's representative/employer 	<p>Material:</p> <ul style="list-style-type: none"> • BSL of 25mm thk shall be used as per approved make and sample by Employer's representative/employer

Request for Qualification cum Request for Proposal for Interior Works of
Special Purpose Vehicle (SPV) Building at ABCD Complex in DSIR

Sr.n o.	Page No	Clause No	Original Clause	To be replaced by
		of Civil and Interior Items, Item no. 217	<ul style="list-style-type: none"> • Veneer shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and Approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS Codes and approved by Employer's representative/employer <p>Workmanship:</p> <ul style="list-style-type: none"> • 35 mm thick top made from IS 303 MR Gradegrade ply with base ply veneer finish matt PU finish • Vertical support from ss 304 grade, including all type of hardware, fittings, fixtures, tools, Tackles, etc. complete. • Work complete including all types of tools, tackles, labour etc. complete at any level and Height. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer 	<ul style="list-style-type: none"> • Hardware's shall be used as per approved make list and confirming to relevant IS codes and Approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS Codes and approved by Employer's representative/employer <p>Workmanship:</p> <ul style="list-style-type: none"> • 25 mm thick top made from BSL. • Vertical support from ss 304 grade, including all type of hardware, fittings, fixtures, tools, Tackles, etc. complete. • Work complete including all types of tools, tackles, labour etc. complete at any level and Height. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer
18.	94	Section 3, C, 1. Technical Specifications of Civil and Interior Items, Item no. 218	<p>Material:</p> <ul style="list-style-type: none"> • IS: 303 MR Grade ply shall be used as per approved make and sample by Employer's representative/employer • Veneer shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and Approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS Codes and approved by Employer's representative/employer <p>Workmanship:</p>	<p>Material:</p> <ul style="list-style-type: none"> • Table shall be used as per approved make and sample by Employer's representative/employer • Glass shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and Approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS Codes and approved by Employer's representative/employer <p>Workmanship:</p>

Request for Qualification cum Request for Proposal for Interior Works of Special Purpose Vehicle (SPV) Building at ABCD Complex in DSIR

Sr.no.	Page No	Clause No	Original Clause	To be replaced by
			<ul style="list-style-type: none"> • 35 mm thick top made from IS: 303 MR Grade grade ply with base ply veneer finish matt PU finish • Vertical support from ss 304 grade, including all type of hardware, fittings, fixtures, tools, Tackles, etc. complete. • Work complete including all types of tools, tackles, labour etc. complete at any level and Height. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer 	<ul style="list-style-type: none"> • Top made from 12 mm thick clear toughened glass • Vertical support from teakwood, including all type of hardware, fittings, fixtures, tools, Tackles, etc. complete. • Work complete including all types of tools, tackles, labour etc. complete at any level and Height. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer
19.	95	Section 3, C, 1. Technical Specifications of Civil and Interior Items, Item no. 219	<p>Material:</p> <ul style="list-style-type: none"> • IS: 303 MR Grade ply shall be used as per approved make and sample by Employer's representative/employer • Veneer shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and Approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS Codes and approved by Employer's representative/employer <p>Workmanship:</p> <ul style="list-style-type: none"> • 35 mm thick top made from IS: 303 MR Grade grade ply with base ply veneer finish matt PU finish • Vertical support from ss 304 grade, including all type of hardware, fittings, fixtures, tools, Tackles, etc. complete. • Work complete including all types of tools, tackles, labour etc. complete at any level and Height. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer 	<p>Material:</p> <ul style="list-style-type: none"> • Table shall be used as per approved make and sample by Employer's representative/employer • Glass shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and Approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS Codes and approved by Employer's representative/employer <p>Workmanship:</p> <ul style="list-style-type: none"> • Top made from 12 mm thick clear toughened glass • Vertical support from teakwood, including all type of hardware, fittings, fixtures, tools, Tackles, etc. complete. • Work complete including all types of tools, tackles, labour etc. complete at any level and Height. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer

Request for Qualification cum Request for Proposal for Interior Works of Special Purpose Vehicle (SPV) Building at ABCD Complex in DSIR

Sr.n o.	Page No	Clause No	Original Clause	To be replaced by
20.	96	Section 3, C, 1. Technical Specifications of Civil and Interior Items, Item no. 220	<p>Material:</p> <ul style="list-style-type: none"> • IS: 303 MR Grade ply shall be used as per approved make and sample by Employer's representative/employer • Veneer shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and Approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS Codes and approved by Employer's representative/employer <p>Workmanship:</p> <ul style="list-style-type: none"> • 35 mm thick top made from IS: 303 MR Grade ply with base ply veneer finish matt PU finish • Vertical support from ss 304 grade, including all type of hardware, fittings, fixtures, tools, Tackles, etc. complete. • Work complete including all types of tools, tackles, labour etc. complete at any level and Height. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer 	<p>Material:</p> <ul style="list-style-type: none"> • Teak wood frame duly polished shall be used as per approved make and sample by Employer's representative/employer • Glass top shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and Approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS Codes and approved by Employer's representative/employer <p>Workmanship:</p> <ul style="list-style-type: none"> • Top made from 12 mm thick clear toughened glass • Vertical support from teakwood, including all type of hardware, fittings, fixtures, tools, Tackles, etc. complete. • Work complete including all types of tools, tackles, labour etc. complete at any level and Height. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer
21.	97	Section 3, C, 1. Technical Specifications of Civil and Interior Items, Item no. 221	<p>Material:</p> <ul style="list-style-type: none"> • IS: 303 MR Grade ply shall be used as per approved make and sample by Employer's representative/employer • Veneer shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and Approved by Employer's representative/employer 	<p>Material:</p> <ul style="list-style-type: none"> • Teakwood Frame duly polished in venge finish shall be used as per approved make and sample by Employer's representative /employer • Glass top shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and Approved by Employer's representative/employer

Request for Qualification cum Request for Proposal for Interior Works of Special Purpose Vehicle (SPV) Building at ABCD Complex in DSIR

Sr.n o.	Page No	Clause No	Original Clause	To be replaced by
			<ul style="list-style-type: none"> • All type of material shall be used as per approved make list and confirming to relevant IS Codes and approved by Employer's representative/employer <p>Workmanship:</p> <ul style="list-style-type: none"> • 35 mm thick top made from IS: 303 MR Grade ply with base ply veneer finish matt PU finish • Vertical support from ss 304 grade, including all type of hardware, fittings, fixtures, tools, Tackles, etc. complete. • Work complete including all types of tools, tackles, labour etc. complete at any level and Height. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer 	<ul style="list-style-type: none"> • All type of material shall be used as per approved make list and confirming to relevant IS Codes and approved by Employer's representative/employer <p>Workmanship:</p> <ul style="list-style-type: none"> • Top made from 12 mm thick clear toughened glass • Vertical support from teakwood, including all type of hardware, fittings, fixtures, tools, Tackles, etc. complete. • Work complete including all types of tools, tackles, labour etc. complete at any level and Height. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/ employer
22.	98	Section 3, C, 1. Technical Specifications of Civil and Interior Items, Item no. 222	<p>Material:</p> <ul style="list-style-type: none"> • IS: 303 MR Grade ply shall be used as per approved make and sample by Employer's representative/employer • Veneer shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and Approved by Employer's representative/employer • All type of material shall be used as per approved make list and confirming to relevant IS Codes and approved by Employer's representative/employer <p>Workmanship:</p> <ul style="list-style-type: none"> • 35 mm thick top made from IS: 303 MR Grade grade ply with base ply veneer finish matt PU finish • Vertical support from ss 304 grade, including all type of hardware, fittings, fixtures, tools, Tackles, etc. complete. 	<p>Material:</p> <ul style="list-style-type: none"> • Teakwood Frame duly polished in venge finish shall be used as per approved make and sample by Employer's representative /employer • Glass shall be used as per approved make and sample by Employer's representative/employer • Hardware's shall be used as per approved make list and confirming to relevant IS codes and Approved by Employer's representative /employer • All type of material shall be used as per approved make list and confirming to relevant IS Codes and approved by Employer's representative/employer <p>Workmanship:</p> <ul style="list-style-type: none"> • Top made from 12 mm thick clear toughened glass • Vertical support from teakwood, including all type of hardware, fittings, fixtures, tools, Tackles, etc. complete.

Request for Qualification cum Request for Proposal for Interior Works of Special Purpose Vehicle (SPV) Building at ABCD Complex in DSIR

Sr.n o.	Page No	Clause No	Original Clause	To be replaced by
			<ul style="list-style-type: none"> • Work complete including all types of tools, tackles, labour etc. complete at any level and Height. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer 	<ul style="list-style-type: none"> • Work complete including all types of tools, tackles, labour etc. complete at any level and Height. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer
23.		Section 3 A, 2.0 Scope of Work, Bullet point nos. 2,3,5,6 & 7	<ul style="list-style-type: none"> • All types of Interior Furnishing works including floor carpeting, wooden flooring, wall panelling, acoustic & insulation treatments, different types of false ceilings, all types of glass works, all types of onsite carpentry works with the laminates, desired polish or paint as required, curtains and blinds, SS railing, false flooring in AV room, high quality operable sliding wall partitions in the banquet hall, all types of sofas, chairs, tables and other misc. furniture, wall paintings, artefacts, dustbins, planter cases, TV units, magazine racks, all types of floor mats, 2D/3D wallpapers etc. • HVAC work from the AHUs and other equipment provided by EPC-contractor, the interior contractor shall take the inputs from the equipment and supply the output to the indoor units through chilled water pipes, supply air ducts, return air ducts, fire dampers, the contractor to provide a separate VRV system with all the indoor and outdoor units and pipes for the banquet hall on the second floor above auditorium. • Extra Low Voltage systems taking the inputs from the existing source pulling all cables through on raceway, cable ladder or conduits whatever shown in the drawings to Audio visual, Data & Voice, CCTV Surveillance and controls, public address, fire alarm, special AV requirement in auditorium and permanent exhibition area. UPS and equipment to be installed if required by the consultant. 	<ul style="list-style-type: none"> • All types of Interior Furnishing works including floor carpeting, wooden flooring, wall panelling, acoustic & insulation treatments, different types of false ceilings, all types of glass works, all types of onsite carpentry works with the laminates, desired polish or paint as required, curtains and blinds, SS railing, false flooring in AV room, high quality operable sliding wall partitions in the banquet hall, all types of sofas, chairs, tables and other misc. furniture, wall paintings, artefacts, dustbins, planter cases, TV units, magazine racks, all types of floor mats, 2D/3D wallpapers etc. • HVAC work from the AHUs and other equipment provided by EPC-contractor, the interior contractor shall take the inputs from the equipment and supply the output to the indoor units through chilled water pipes, supply air ducts, return air ducts, fire dampers, the contractor to provide a separate VRV system with all the indoor and outdoor units and pipes for the banquet hall on the second floor above auditorium. • Extra Low Voltage systems taking the inputs from the existing source pulling all cables through on raceway, cable ladder or conduits whatever shown in the drawings to Audio visual, Data & Voice, CCTV Surveillance and controls, public address, fire alarm, special AV requirement in conference / meeting rooms auditorium and permanent exhibition area. UPS and equipment to be installed if required by the consultant.

Request for Qualification cum Request for Proposal for Interior Works of Special Purpose Vehicle (SPV) Building at ABCD Complex in DSIR

Sr.no.	Page No	Clause No	Original Clause	To be replaced by						
			<ul style="list-style-type: none"> Plumbing work is required in one toilet attached with the green rooms and lounge at the back of the stage including drainage, sewage, water supply, fixtures and fittings etc. Firefighting work in the whole scope area using the same Fire Hydrant Shafts which are in existing EPC-Contractor scope for sprinklers etc. 	<ul style="list-style-type: none"> Plumbing work is required in one toilet attached with the cabinsgreen rooms and kitchen/pantries lounge at the back of the stage including drainage, sewage, water supply, fixtures and fittings etc. Firefighting work in the whole scope area using the same Fire Hydrant Shafts which are in existing EPC-Contractor scope for sprinklers etc. Fire NOC / certification earlier obtained by EPC-contractor shall be obtained/renewed for SPV building from the Fire Department/Authority due to the construction of works through this contract. 						
24.		Section 3, C, Make List, LIST OF APPROVED MAKES OF MATERIAL FOR ELECTRICAL WORK	6. Electrical Works, S.no. 95 <table border="1" data-bbox="533 724 1249 799"> <tr> <td data-bbox="533 724 629 799">95</td> <td data-bbox="629 724 902 799">AUDIO VISUAL</td> <td data-bbox="902 724 1249 799">HI-TECH/Christie/RCF/Bosch</td> </tr> </table>	95	AUDIO VISUAL	HI-TECH/Christie/RCF/Bosch	6. Electrical Works, S.no. 95 <table border="1" data-bbox="1344 724 2060 799"> <tr> <td data-bbox="1344 724 1440 799">95</td> <td data-bbox="1440 724 1713 799">AUDIO VISUAL</td> <td data-bbox="1713 724 2060 799">HI-TECH/Christie/RCF/Bosch</td> </tr> </table>	95	AUDIO VISUAL	HI-TECH/Christie/RCF/Bosch
95	AUDIO VISUAL	HI-TECH/Christie/RCF/Bosch								
95	AUDIO VISUAL	HI-TECH/Christie/RCF/Bosch								
25.	63	Section 3, C, 1. Technical Specifications of Civil and Interior Items, Item no. 179	Supply and installation of AISI 316 Grade Stainless Steel Knock Down railing system comprising Ø 38mm Handrail fixed on Ø 38mm S.S. Round baluster (Design Code DT11-1-163) placed at maximum 1200mm c/c along with 3 Nos. Ø 16 mm mid rails connected at the side of baluster with fixtures. The balustrade would be fixed onto floor with casted base plate of minimum 6mm thickness. Base plate shall be concealed with suitable S.S. 316 grade cover Cap so that the mounting anchor fasteners are not visible after installation. Railing Should be tested for Appropriate load Testing Criteria as per International Railing Standard. Wall thickness of all Pipes shall be taken as 1.5mm along with all visible components developed in High Grade S.S. and whenever required, joints to be filled with bushings	Material: <ul style="list-style-type: none"> Glass and ss railing (Olive) shall be used as per approved make and sample by Employer's representative/employer. All type of material shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer. Workmanship: <ul style="list-style-type: none"> 12 mm thick toughened glass fixed in system and 60 MM Square hand rail as per drawing. SS and glass railing work complete as per standard Manufacturers specifications. 						

Request for Qualification cum Request for Proposal for Interior Works of
Special Purpose Vehicle (SPV) Building at ABCD Complex in DSIR

Sr.n o.	Page No	Clause No	Original Clause	To be replaced by
			<p>for extra strength. Railing height to be taken @ 915mm from floor level as per manufacturers specifications complete as direction of Employer / Employer's representative.</p> <p>Dia 50mm Round Baluster System with 12mm Toughened Glass: Supply and installation of 304 Grade Stainless Steel Knock Down railing system comprising Ø 50mm Handrail fixed on Ø 50mm S.S. Round baluster with glass holding accessories (including top bracket to hold hand railing), placed at maximum 1200mm c/c along with 12mm thick toughened glass connected with baluster with special glass holding fixtures. The Glass height should be taken as minimum 735mm. The balustrade would be fixed on Side of floor with casted base plate of minimum 8mm thickness. Wall thickness of all Pipes shall be taken as 1.5mm along with all visible components developed in High Grade S.S. Railing height to be taken @ 1000mm from floor level. [On Site Welding of SS Pipe will not be allowed], Installation to be done by the approved Manufacturer.</p> <p>No Welding OR Fabrication is required at site as all the parts are being manufactured at fully equipped factory with modern machinery achieving highest quality and utmost accuracy. It also eliminates any damage at site which normally happens during fabrication work of railing. 1.5mm and 1.2mmthick metal is used for Handrail and Balustrade System to provide more strength. As per site condition, extra long High Tensioned Anchors and Fasteners to be used to fix the balustrade on floor area to give additional strength to mounting of balustrade.</p> <p>MEASUREMENTS Measurements will be taken over the finished line of Glass railing in running metres, correct to a cm.</p> <p>RATES</p>	<ul style="list-style-type: none"> • All the work complete as per the detailed drawing and instruction of Employer's representative/employer. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer. <p>Measurements:</p> <ul style="list-style-type: none"> • The rate shall be consolidated for all above items. • The rate shall include the cost of all materials, labour, scaffolding etc. to complete the whole work satisfactorily as per instruction of Employer's representative/employer. • No extra payment will be given for any of the reasons. • Rate to be inclusive of all material, wastage, necessary tools tackles etc for fixing at all heights and for all floors. • Area shall be measured in Running Meter.

Request for Qualification cum Request for Proposal for Interior Works of Special Purpose Vehicle (SPV) Building at ABCD Complex in DSIR

Sr.n o.	Page No	Clause No	Original Clause	To be replaced by
			Rate for the item shall include the cost of all materials, plant, machinery and labour involved in all operations described above, including all cartage and lifts, complete for a successful completion of the work.	
26.	36	Part II- II General Conditions of Contract 1.56 Liquidated Damages	<p>Prior to occurrence of MS-I, the Contractor shall have</p> <p>(a) completed all stipulated works on Ground floor and Second floor of SPV building in all aspects</p> <p>(b) completed construction of all the miscellaneous works located within entire site area as indicated in drawings and as per direction of Employer / Employer's representative</p> <p>(c) completed various construction activities entitling him to a cumulative gross payment of at least 55% of the total contract value</p> <p>b. In the event of the Contractor failing to achieve interim/ final completion dates as in para (a) above within a period of 30 days from the date set forth as per above schedule, the contractor shall be liable to pay as liquidated damage an amount equal to zero point one percent (0.1%) per day of delay for the cost of unexecuted work for each interim/ final completion up to the date of actual completion subject to the maximum amount of ten percent (10%) of total contact price. Such unexecuted work shall be determined based on contractor invoices as found good for payment as certified by Employer / Employer's representative up to the respective date(s) of respective interim/ final completion. In the event Liquidated Damages are levied the same shall be computed wef such respective date(s) of respective interim/ final completion considering 15 days grace period as above.</p>	<p>I. The Contractor shall complete MS – I within 3 ½ months from the commencement date consisting of following:</p> <p>(a) Completion of all works on Ground floor all around within & outside building as stipulated in contract and Second floor of SPV building including operational working condition in all aspects for both floors and keep all such areas fit for Employer's occupancy and handing over same to the Employer for regular use. The Operational readiness shall include works related to Air-conditioning & Ventilation, Electrical Systems, Water & Sanitation System, ELV & AV system, Firefighting (including taking requisite certificate from concerned agency). However, the composite Testing & Commissioning of such systems can be performed by the Contractor along with completion of balance works under the contract.</p> <p>(b) Completion of construction of all the miscellaneous works located within entire site area at ground & Other floors as indicated in drawings and as per direction of Employer Representative/ Employer.</p> <p>(c) Achievement of Cumulative work progress amounting to gross admissible payment of at least 55% of the total contract value including completion of progress in balance areas/ other floors as to be certified by Employer's Representative/Employer</p> <p>II MS-II is Project completion date which is 5 months from the commencement date. The Contractor shall have completed the construction in all aspects in accordance to this agreement.</p>

Request for Qualification cum Request for Proposal for Interior Works of
Special Purpose Vehicle (SPV) Building at ABCD Complex in DSIR

Sr.n o.	Page No	Clause No	Original Clause	To be replaced by
				<p>b. In the event of the Contractor failing to achieve interim/ final completion dates as in para (a) above within a period of 30 days from the date set forth as per above schedule, the contractor shall be liable to pay as liquidated damage an amount equal to zero point one percent (0.1%) per day of delay for the cost of unexecuted work for each interim/ final completion up to the date of actual completion subject to the maximum amount of ten percent (10%) of total contact price. Such unexecuted work shall be determined based on contractor invoices as found good for payment as certified by Employer / Employer's representative up to the respective date(s) of respective interim/ final completion. In the event Liquidated Damages are levied the same shall be computed wef such respective date(s) of respective interim/ final completion considering 30 days grace period as above.</p>
27.	-	Section 3, C, 1. Technical Specifications of Civil and Interior Items, Item no. 185	-	<p>Materials:</p> <ul style="list-style-type: none"> • 1 Hour fire resistant door shall be used as per sample approved by Employer's representative/employer. • Hardware shall used of as per approved by Employer's representative/employer. • All type of material shall be used for Door as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer. <p>Workmanship:</p> <ul style="list-style-type: none"> • 1 Hour fire resistant door shall be complete as per above describe specification. • All doors should be properly leveled without any sagging and with smooth opening and closing. There should be no variation or deviation of any kinds. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer.

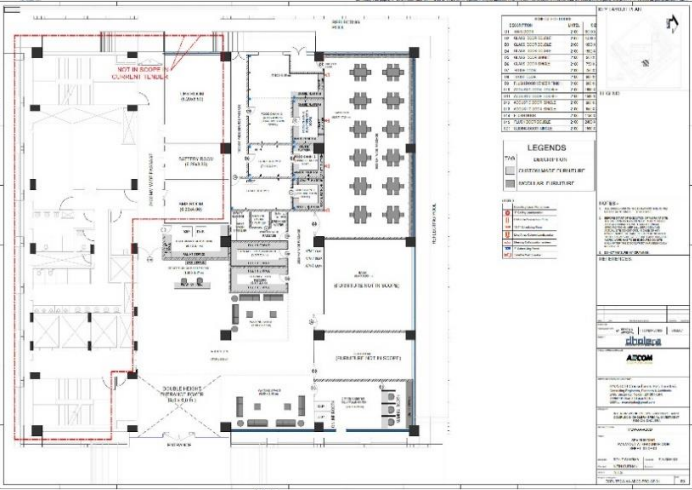
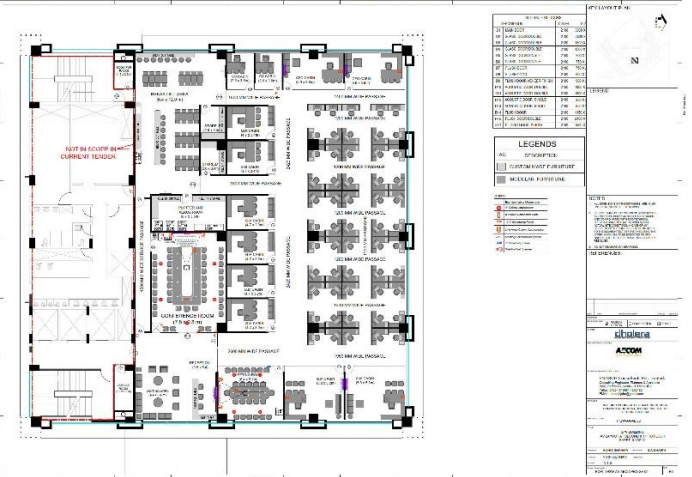
Request for Qualification cum Request for Proposal for Interior Works of
Special Purpose Vehicle (SPV) Building at ABCD Complex in DSIR

Sr.n o.	Page No	Clause No	Original Clause	To be replaced by
				<p>Measurements:</p> <ul style="list-style-type: none"> • The rate shall be consolidated for all above items. • The rate shall include the cost of all materials, finishing, labour, etc. to complete the whole work satisfactorily as per instruction of Employer's representative/employer. • No extra payment will be given for any of the reasons. • Rate to be inclusive of all material, wastage, necessary tools tackles etc for fixing at all heights and for all floors. Clear opening area shall be measured & paid in meter.
28.	-	Section 3, C, 1. Technical Specifications of Civil and Interior Items, Item no. 186	-	<p>Materials:</p> <ul style="list-style-type: none"> • 1 Hour fire resistant door shall be used as per sample approved by Employer's representative/employer. • Hardware shall used of as per approved by Employer's representative/employer. • All type of material shall be used for Door as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer. <p>Workmanship:</p> <ul style="list-style-type: none"> • 1 Hour fire resistant door shall be complete as per above describe specification. • All doors should be properly leveled without any sagging and with smooth opening and closing. There should be no variation or deviation of any kinds. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer. <p>Measurements:</p> <ul style="list-style-type: none"> • The rate shall be consolidated for all above items.

Request for Qualification cum Request for Proposal for Interior Works of
Special Purpose Vehicle (SPV) Building at ABCD Complex in DSIR

Sr.n o.	Page No	Clause No	Original Clause	To be replaced by
				<ul style="list-style-type: none"> • The rate shall include the cost of all materials, finishing, labour, etc. to complete the whole work satisfactorily as per instruction of Employer's representative/employer. • No extra payment will be given for any of the reasons. • Rate to be inclusive of all material, wastage, necessary tools tackles etc for fixing at all heights and for all floors. Clear opening area shall be measured & paid in Square meter.
29.	-	Section 3, C, 1. Technical Specifications of Civil and Interior Items, Item no. 187	-	<p>Materials:</p> <ul style="list-style-type: none"> • Panic bar / latch shall be used as per sample approved by Employer's representative/employer. • Hardware shall used of as per approved by Employer's representative/employer. • All type of material shall be used as per approved make list and confirming to relevant IS codes and approved by Employer's representative/employer. <p>Workmanship:</p> <ul style="list-style-type: none"> • Panic bar / latch shall be complete as per above describe specification. • The whole work is to be completed as per design; sample material & any other requirement shall be as per instruction of Employer's representative/employer. <p>Measurements:</p> <ul style="list-style-type: none"> • The rate shall be consolidated for all above items. • The rate shall include the cost of all materials, finishing, labour, etc. to complete the whole work satisfactorily as per instruction of Employer's representative/employer. • No extra payment will be given for any of the reasons. • Rate to be inclusive of all material, wastage, necessary tools tackles etc for fixing at all heights and for all floors. • Rate to be measured in Numbers

Request for Qualification cum Request for Proposal for Interior Works of Special Purpose Vehicle (SPV) Building at ABCD Complex in DSIR

Sr.n o.	Page No	Clause No	Original Clause	To be replaced by
30.		Section 4 Tender Drawings		<p>Inclusion of following drawings: ECPL-TP2W-AA-ABCD-PRO-GF-01</p>  <p>ECPL-TP2W-AA-ABCD-PRO-SF-02</p> 

Request for Qualification cum Request for Proposal for Interior Works of
 Special Purpose Vehicle (SPV) Building at ABCD Complex in DSIR

Sr.n o.	Page No	Clause No	Original Clause	To be replaced by
				<p>ECPL-TP2W-AA-ABCD-PRO-FF-01</p>